

Hard Mount Washer-Extractor


Powerful yet economical, Oasis washers are designed for ease of use, with a high contrast Graphic LCD Screen to guide users. With separate, large compartments for the different types of detergent, users can opt for their cleaning agent of choice, while the unique dimpled and perforated drum increases surface contact with the clothes to help achieve a better cleaning effect.

Additionally, the highly-efficient DC motor technology further cuts down the utility bills and operation cost without compromising on the washer's performance.



High Contrast
Graphic LCD Screen

Easy to use
Control Panel

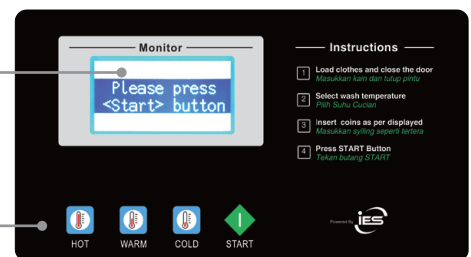

Features

- Sturdy industrial Rigid Mount Structure
- Energy saving DC motor Technology
- High G Force of 250G
- Four compartment detergent box
- Unique dimpled and perforated drum
- Quality Parts – (NSK Bearing, Depend-O-Drian Valve**)
- Single Phase for Easy Installation
- High Contrast Graphic LCD Screen
- Multiple Payment Options**

Options


- AISI304 Stainless steel Front Panel or Artificial Stainless Steel Panel
- Additional 3/4" Water Inlet Valve

** Please refer to Oasis local distributor/dealer for further information.


Technical Specifications

Models	SXT-105GT	SXT-135GT	SXT-185GT
DRUM			
Nominal Capacity 1:10	10	13	18
Maximum Capacity 1:9	11	14	20
Drum Volume (Liter)	90	128	186
Drum Diameter (mm)	610	610	683
Drum Depth (mm)	310	440	504
DIMENSIONS			
Width (mm)	736	736	811
Height (mm)	1171	1171	1264
Depth (mm)	815	911	1063
Weight (kg)	220	230	280
DIMENSIONS WITH PACKAGING			
Crated Width (mm)	760	760	811
Crated Height (mm)	1300	1300	1450
Crated Depth (mm)	840	911	1063
Crated Weight (kg)	240	260	320
DOOR			
Door Opening (mm)	394	394	394
Height To Center Of Door (mm)	611	611	611
CONNECTION			
Water Inlet (mm)	19	19	19
Drain (mm)	51	51	73
OPERATING SPEED			
Washing Speed (RPM)	45-48	45-48	40-45
Extract Speed (RPM) - Maximum	850	850	800
G-Force - Maximum	245	245	245
MOTOR			
Type of Motor (AC/DC)	DC	DC	AC
Motor Power Consumption (kW)	0.37	0.37	2.2
ELECTRICAL REQUIREMENT			
Power Supply	220-240VAC @ 50/60Hz + 1PH		


* Due to continuous product improvements, design and specifications are subject to change without prior notice.

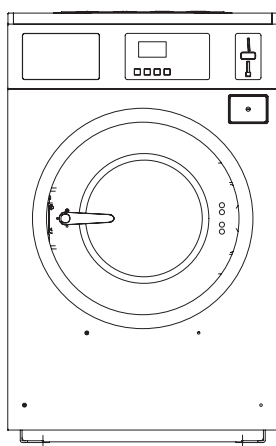

Front View

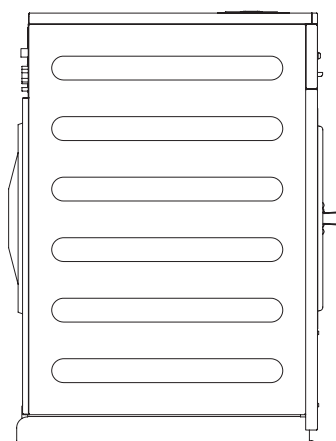

Side View

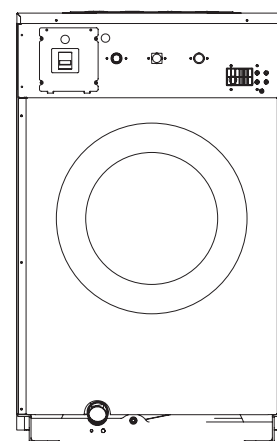

Back View

Soft Mount Washer-Extractor Type A

Designed with a heavy duty suspension absorber system to eliminate the need for a special concrete foundation, our soft mount washer is convenient for installation on higher floors. It also features high G-force extraction to reduce water remaining in the laundry after a wash, and thus reduces drying time and utility cost.



Features

- Industrial design with heavy-duty suspension absorber
- Energy saving DC motor Technology
- 350 G Force
- Four compartment detergent box
- Unique dimpled and perforated drum
- Quality Parts – (NSK Bearing, Suspa Absorbers, Depend-O-Drian Valve**)
- Single Phase for Easy Installation
- High Contrast Graphic LCD Screen
- Multiple Payment Options**


Options

- AISI304 Stainless steel Front Panel or Artificial Stainless Steel Panel
- Additional 3/4" Water Inlet Valve


Technical Specifications

Models	SXT-100FT	SXT-130FT
DRUM		
Nominal Capacity 1:10	9	11
Maximum Capacity 1:9	10	13
Drum Volume (Liter)	84	110
Drum Diameter (mm)	532	532
Drum Depth (mm)	376	415
DIMENSIONS		
Width (mm)	710	800
Height (mm)	1114	1184
Depth (mm)	772	836
Weight (kg)	210	250
DIMENSIONS WITH PACKAGING		
Crated Width (mm)	730	830
Crated Height (mm)	1250	1320
Crated Depth (mm)	810	880
Crated Weight (kg)	220	260
DOOR		
Door Opening (mm)	394	394
Height To Center Of Door (mm)	556	592
CONNECTION		
Water Inlet (mm)	19	19
Drain (mm)	51	51
OPERATING SPEED		
Washing Speed (RPM)	45-48	45-48
Spinning Speed (RPM) - Maximum	1100	1100
G-Force - Maximum	350	350
MOTOR		
Type of Motor (AC/DC)	DC	DC
Motor Power Consumption (kW)	0.37	0.37
ELECTRICAL REQUIREMENT		
Power Supply	220-240VAC @ 50/60Hz + 1PH	


* Due to continuous product improvements, design and specifications are subject to change without prior notice.

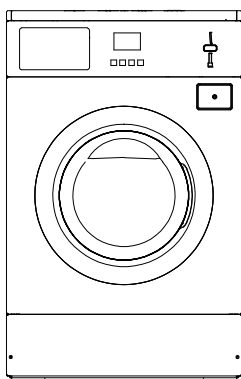

Front View

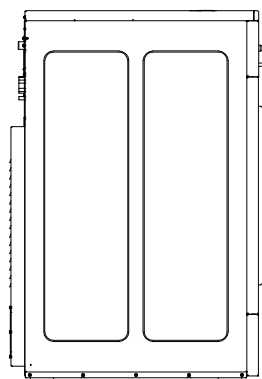

Side View

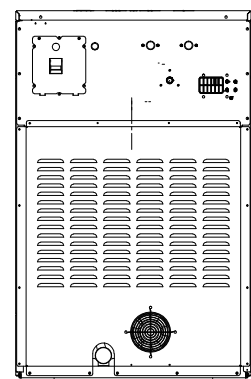

Back View

Soft Mount Washer-Extractor Type B

Designed with a heavy duty suspension absorber system to eliminate the need for a special concrete foundation, our soft mount washer is convenient for installation on higher floors. It also features high G-force extraction to reduce water remaining in the laundry after a wash, and thus reduces drying time and utility cost.



Features

- Industrial design with heavy-duty suspension absorber
- 300 G Force
- Four compartment detergent box
- Unique perforated drum
- Quality Parts – (NSK Bearing, Suspa Absorbers, Depend-O-Drian Valve**)
- Single Phase for Easy Installation
- High Contrast Graphic LCD Screen
- Multiple Payment Options**


Options

- AISI304 Stainless steel Front Panel or Artificial Stainless Steel Panel
- Additional 3/4" Water Inlet Valve


Technical Specifications

Models	SXT-170FT	SXT-280FT
DRUM		
Nominal Capacity 1:10	15	25
Maximum Capacity 1:9	17	28
Drum Volume (Liter)	149	251
Drum Diameter (mm)	774	774
Drum Depth (mm)	438	534
DIMENSIONS		
Width (mm)	912	1062
Height (mm)	1343	1445
Depth (mm)	877	1202
Weight (kg)	300	720
DIMENSIONS WITH PACKAGING		
Crated Width (mm)	950	1100
Crated Height (mm)	1450	1550
Crated Depth (mm)	900	1228
Crated Weight (kg)	315	735
DOOR		
Door Opening (mm)	418	418
Height To Bottom Of Door (mm)	460	550
CONNECTION		
Water Inlet (mm)	19	19
Drain (mm)	51	76
OPERATING SPEED		
Washing Speed (RPM)	42-45	42-45
Spinning Speed (RPM) - Maximum	900	860
G-Force - Maximum	300	320
MOTOR		
Type of Motor (AC/DC)	AC	AC
Motor Power Consumption (kW)	1.5	2.2
ELECTRICAL REQUIREMENT		
Power Supply	220-240VAC @ 50/60Hz + 1PH	


* Due to continuous product improvements, design and specifications are subject to change without prior notice.

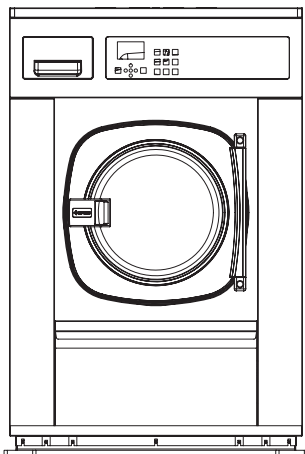

Front View

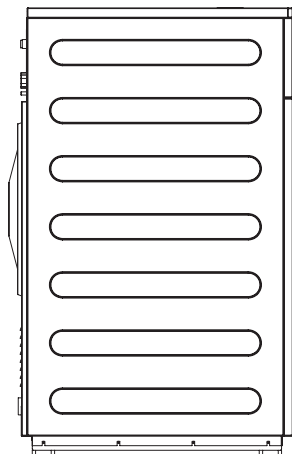

Side View

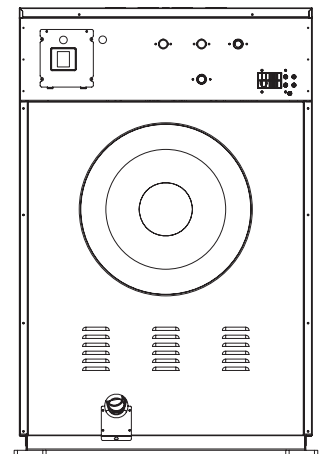

Back View