

Soft Mount Washer-Extractor Type A

Designed with a heavy duty suspension absorber system to eliminate the need for a special concrete foundation, our soft mount washer is convenient for installation on higher floors. It also features high G-force extraction to reduce water remaining in the laundry after a wash, and thus reduces drying time and utility cost.



Features

- Industrial design with heavy-duty suspension absorber
- Energy saving DC motor Technology
- 350 G Force
- Four compartment detergent box
- Unique dimpled and perforated drum
- Quality Parts – (NSK Bearing, Suspa Absorbers, Depend-O-Drian Valve**)
- Single Phase for Easy Installation
- High Contrast Graphic LCD Screen
- Multiple Payment Options**


Options

- AISI304 Stainless steel Front Panel or Artificial Stainless Steel Panel
- Additional 3/4" Water Inlet Valve


Technical Specifications

Models	SXT-100FT	SXT-130FT
DRUM		
Nominal Capacity 1:10	9	11
Maximum Capacity 1:9	10	13
Drum Volume (Liter)	84	110
Drum Diameter (mm)	532	532
Drum Depth (mm)	376	415
DIMENSIONS		
Width (mm)	710	800
Height (mm)	1114	1184
Depth (mm)	772	836
Weight (kg)	210	250
DIMENSIONS WITH PACKAGING		
Crated Width (mm)	730	830
Crated Height (mm)	1250	1320
Crated Depth (mm)	810	880
Crated Weight (kg)	220	260
DOOR		
Door Opening (mm)	394	394
Height To Center Of Door (mm)	556	592
CONNECTION		
Water Inlet (mm)	19	19
Drain (mm)	51	51
OPERATING SPEED		
Washing Speed (RPM)	45-48	45-48
Spinning Speed (RPM) - Maximum	1100	1100
G-Force - Maximum	350	350
MOTOR		
Type of Motor (AC/DC)	DC	DC
Motor Power Consumption (kW)	0.37	0.37
ELECTRICAL REQUIREMENT		
Power Supply	220-240VAC @ 50/60Hz + 1PH	


* Due to continuous product improvements, design and specifications are subject to change without prior notice.

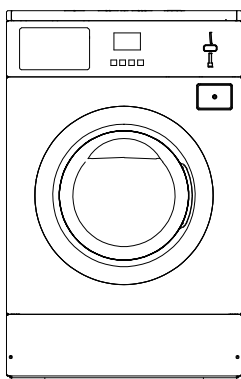

Front View

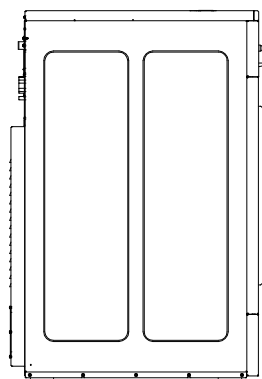

Side View

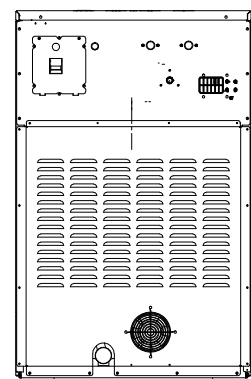

Back View