

Soft Mount Washer-Extractor Type B

Designed with a heavy duty suspension absorber system to eliminate the need for a special concrete foundation, our soft mount washer is convenient for installation on higher floors. It also features high G-force extraction to reduce water remaining in the laundry after a wash, and thus reduces drying time and utility cost.



Features

- Industrial design with heavy-duty suspension absorber
- 300 G Force
- Four compartment detergent box
- Unique perforated drum
- Quality Parts – (NSK Bearing, Suspa Absorbers, Depend-O-Drian Valve**)
- Single Phase for Easy Installation
- High Contrast Graphic LCD Screen
- Multiple Payment Options**


Options

- AISI304 Stainless steel Front Panel or Artificial Stainless Steel Panel
- Additional 3/4" Water Inlet Valve


Technical Specifications

Models	SXT-170FT	SXT-280FT
DRUM		
Nominal Capacity 1:10	15	25
Maximum Capacity 1:9	17	28
Drum Volume (Liter)	149	251
Drum Diameter (mm)	774	774
Drum Depth (mm)	438	534
DIMENSIONS		
Width (mm)	912	1062
Height (mm)	1343	1445
Depth (mm)	877	1202
Weight (kg)	300	720
DIMENSIONS WITH PACKAGING		
Crated Width (mm)	950	1100
Crated Height (mm)	1450	1550
Crated Depth (mm)	900	1228
Crated Weight (kg)	315	735
DOOR		
Door Opening (mm)	418	418
Height To Bottom Of Door (mm)	460	550
CONNECTION		
Water Inlet (mm)	19	19
Drain (mm)	51	76
OPERATING SPEED		
Washing Speed (RPM)	42-45	42-45
Spinning Speed (RPM) - Maximum	900	860
G-Force - Maximum	300	320
MOTOR		
Type of Motor (AC/DC)	AC	AC
Motor Power Consumption (kW)	1.5	2.2
ELECTRICAL REQUIREMENT		
Power Supply	220-240VAC @ 50/60Hz + 1PH	


* Due to continuous product improvements, design and specifications are subject to change without prior notice.

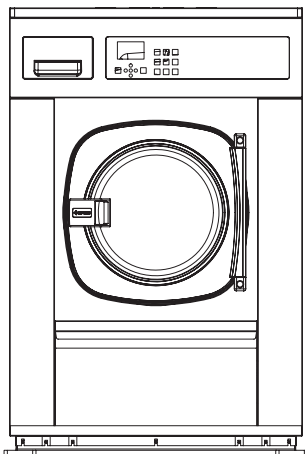

Front View

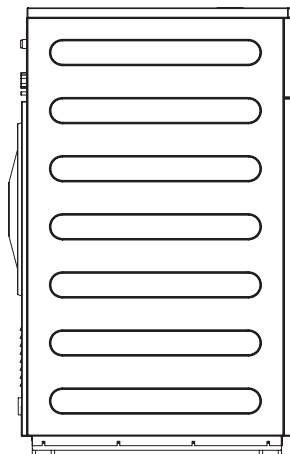

Side View

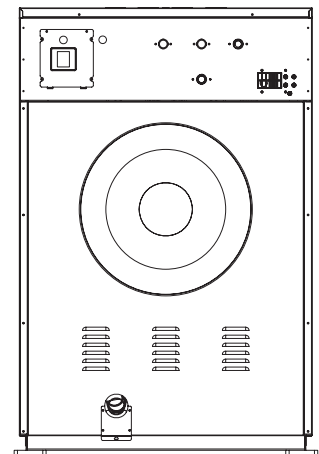

Back View